


SUPERTECHNO 15

Max. lens height:	4,57 m / 15 ft.
Max. telescopic extent:	2,86 m / 9 ft.
Max. camera weight:	35 kg / 80 lb
Total weight:	559 kg / 1233 lb
Max. speed	0,75 m/s

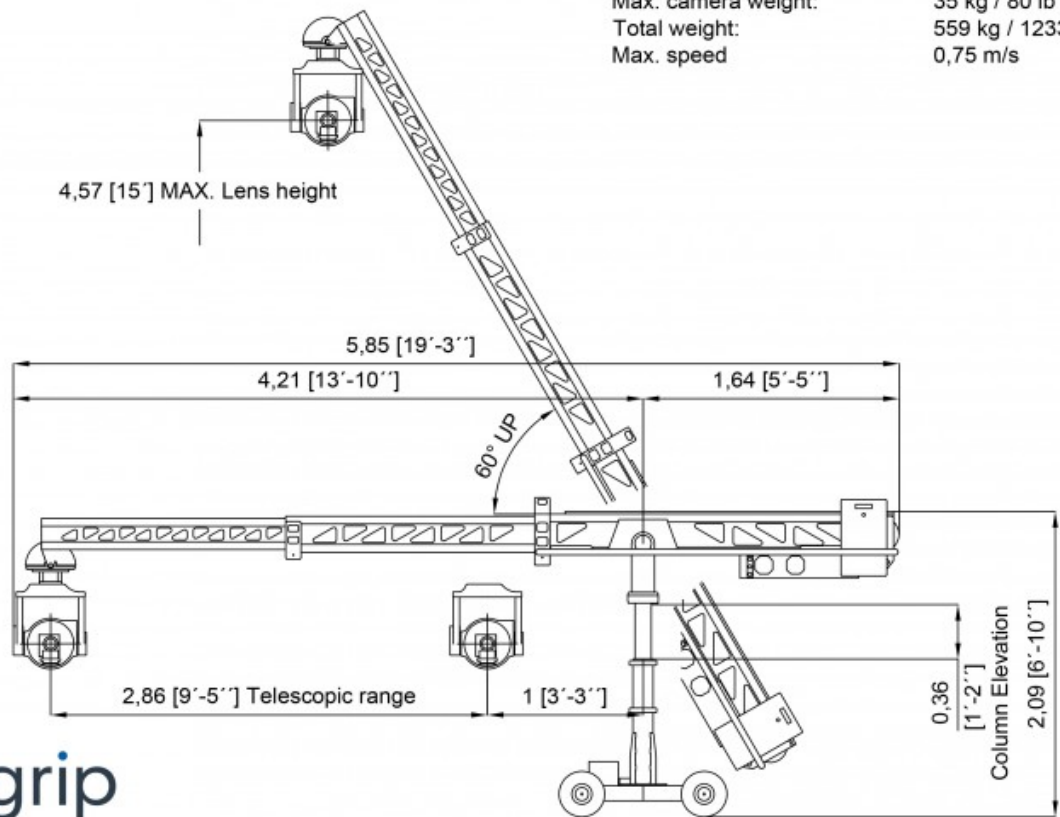

eurogrip
YOUR EYE FOR MOVEMENT

The (r)evolution on using cranes in small spaces. Enables you to perform complex camera movements between obstacles that previously were not possible.

The Super Techno 15 fits through a standard door of 90 cm. All the advantages of a telescopic crane are now applicable for interior shots.

This crane comes with a Z-head by default, but can also be fitted with a gyro-stabilized head. In this configuration, the Techno 15 is mainly used for travel-shots from a pickup or low-rider.

SPECS

Max Payload (Head + Camera)	59 kg (130 lbs)
Max Length (Pivot to Front End)	4.21 m (13.81 ft)
Min Length (Pivot to Front End)	1.34 m (4.4 ft)
Rear Section Length (Pivot to Rear End)	1.64 m (5.38 ft)
Max Lens Height Underslung	4.57 m (14.99 ft)
Telescopic Travel	2.86 m (9.38 ft)
Telescopic Travel Speed	0.75 m/s (2.46 ft/s)
Dolly Length	1.11 m (3.64 ft)
Dolly Width	0.88 m (2.89 ft)
Total Maximum Weight	559 kg (1232 lbs)

Footprint 360° Length	4.5 m (14.76 ft)
Footprint 360° Width	4.5 m (14.76 ft)
Footprint 180° Length	4.5 m (14.76 ft)
Footprint 180° Width	2.5 m (8.2 ft)
Power Requirement	220 V, 16 Amp
Weather Proof	No
Raincover	Yes
Track Wheels	Yes
Track Size	880 mm (34.6 inch)